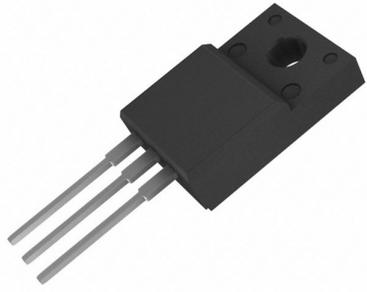
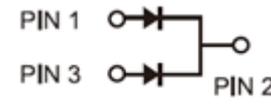


<p><b>Excellent Schottky Rectifier</b></p>	<p><b>REVERSE VOLTAGE - 45 Volts</b> <b>FORWARD CURRENT - 20.0 Amperes</b></p>
<p><b>FEATURES</b></p> <ul style="list-style-type: none"> <li>• Low power loss, high efficiency</li> <li>• Low forward voltage drop</li> <li>• High forward surge capability</li> <li>• High frequency operation</li> <li>• Excellent high temperature stability</li> <li>• Excellent Schottky technology</li> </ul> <p><b>MECHANICAL DATA</b></p> <ul style="list-style-type: none"> <li>• Case: TO-220F</li> <li>• Polarity: As marked</li> <li>• Weight: Approximated 1.6 grams</li> </ul>	<p>TO-220F</p>  

<p><b>MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS</b></p> <p>Ratings at 25°C ambient temperature unless otherwise specified. Single phase, half wave, 60Hz, resistive or inductive load. For capacitive load. derate current by 20%</p>
--

Characteristics	Symbol	Value	Unit								
Maximum Repetitive Peak Reverse Voltage	$V_{RRM}$	45	V								
RMS Reverse Voltage	$V_{RMS}$	31.5	V								
Forward Voltage Drop $I_F=10A$ ( $T_J=25^\circ C$ ) $I_F=10A$ ( $T_J=125^\circ C$ ) $I_F=20A$ ( $T_J=25^\circ C$ )	$V_F$	<table border="1"> <tr> <td>Typ.</td> <td>Max.</td> </tr> <tr> <td>-</td> <td>0.53</td> </tr> <tr> <td>-</td> <td>0.51</td> </tr> <tr> <td>-</td> <td>0.67</td> </tr> </table>	Typ.	Max.	-	0.53	-	0.51	-	0.67	V
Typ.	Max.										
-	0.53										
-	0.51										
-	0.67										
Maximum Reverse Current at Rated $V_{RRM}$ $T_J=25^\circ C$ $T_J=125^\circ C$	$I_R$	<table border="1"> <tr> <td>Max.</td> </tr> <tr> <td>500</td> </tr> <tr> <td>30</td> </tr> </table>	Max.	500	30	<table border="1"> <tr> <td><math>\mu A</math></td> </tr> <tr> <td>mA</td> </tr> </table>	$\mu A$	mA			
Max.											
500											
30											
$\mu A$											
mA											
Maximum Average Forward Rectified Current Total device Per diode	$I_O$	<table border="1"> <tr> <td>20</td> </tr> <tr> <td>10</td> </tr> </table>	20	10	A						
20											
10											
Peak Forward Surge Current, 8.3 ms Single Half Sine-wave Superimposed on Rated Load (JEDEC method)	$I_{FSM}$	150	A								
Peak Repetitive Reverse Current at $t_p=2 \mu s$ , 1 kHz,	$I_{RRM}$	1.0	A								
Operating and Storage Temperature Range	$T_J, T_{STG}$	-55 to +150	$^\circ C$								

## Rating and Characteristic Curves

FIG. 1-Typical Forward Current Derating Curve

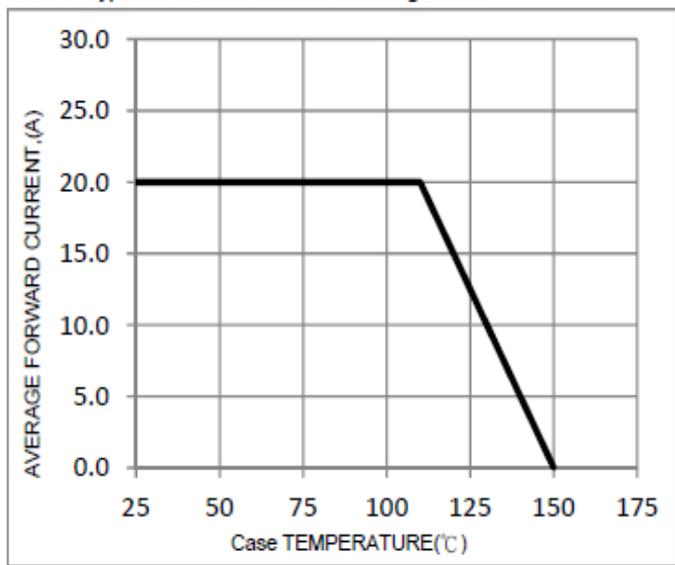


FIG. 2-Typical Forward Characteristics

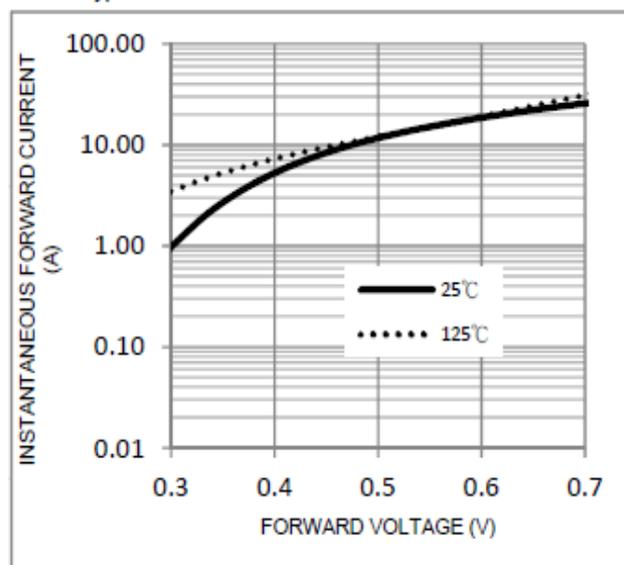


FIG. 3-Maximum Non-Repetitive Forward Surge Current

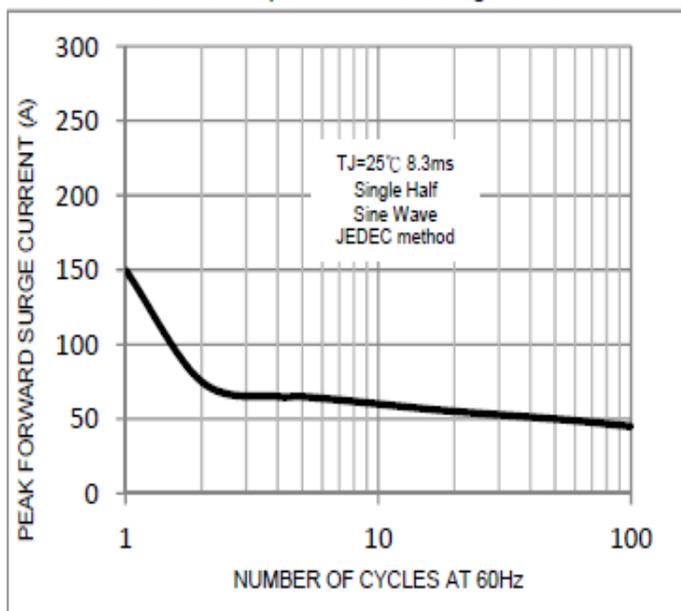


FIG. 4-Typical Reverse Characteristics

